

12,000 & 15,000 LB. CAPACITY LIFTS

**M O D E L S**

**LMF-12 & TP-15**



LIFTS  
TO  
HIGHER  
STANDARDS

**MOHAWK**   
MADE IN THE U.S.A.



# MOHAWK, THE NAME YOU KNOW, THE NAME YOU TRUST, THE NAME FOR HEAVY DUTY LIFTS

## MOHAWK'S DESIGN & SAFETY SYSTEMS

- Automatic safety systems feature Mohawk's patented internal and external hydraulic locking systems, plus all-position mechanical locks, engaging in both columns at every height, from the ground to maximum lifting height.
- Automatic engaging swing arm restraints engage as soon as the arms start to rise.
- Electric motor pumps fluid into the two cylinders, displacing fluid to the main and off-side cylinders, delivering safe, even lifting.
- Direct drive lifting system provides trouble-free operation, eliminating cables, chains or screw drives, which stretch & fray, requiring regular maintenance, inspection and replacement.
- Mohawk columns are constructed of US made  $\frac{3}{4}$ " thick L shaped, forklift masts, not bent sheet metal like other brands.
- Mohawk carriages roll on (16) 4" self-lubricating, steel ball bearing rollers, not bushings and not plastic slide blocks like the imitators.
- Large 4"+ cylinders operate at low pressure, extending the life of the motor, pump and hydraulic components.
- The best, and most inclusive warranty in the lift business. 5 years for the lift, plus the industry's only limited **lifetime** cylinder warranty.\* Mohawk builds the best lifts, with the best warranty.
- Lease/purchase plans available for 1-5 years. Call Mohawk now!

## 12,000 OR 15,000 LB. WEIGHT CAPACITY

- Mohawk, the original heavy duty two-post lift, because experience counts. These Mohawk models are the first above-ground lifts with the capacity to handle extra heavy vehicles such as ambulances, utility trucks, and delivery vans.
- The ideal lift for fleets, truck, and general repair garages. When lowered, the swing arms fit under all but the lowest riding sports cars.
- Standard equipment includes four 5", 7½" and 10" truck adaptors for easy access around running boards, and utility bodies.

\* After 5 years see limited lifetime cylinder warranty

US Patent #4500071  
Canadian Patent # 436053

**MOHAWK**   
MADE IN THE U.S.A.




TP-15 shown above with hydraulic lines routed in-



Mohawk fork lift channel column and bearing (red/silver) shown with competitive lift sheet metal column and plastic slide block (blue/yellow).



Mohawk lifts DO NOT use height restrictive overhead cable covers that limit lifting height. Mohawk lifts use stainless steel hydraulic lines. Not rubber hoses.

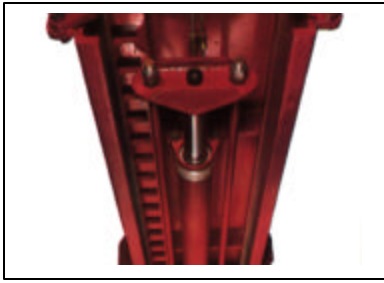

Mohawk columns are constructed of  $\frac{3}{4}$ " thick American made forklift channel – the best material available – for years of **trouble-free** service. Built like a forklift to last like a forklift.




Mohawk's all-position mechanical safety locks are backed by a patented hydraulic locking safety system, providing positive locking at every working height.



6' under-arm clearance, with 6'5" to the vehicle frame make it easy to service all cars and trucks for even the tallest technicians.



Mohawk carriages roll on 16 4" self-lubricating steel ball bearing rollers, for years of maintenance-free service.

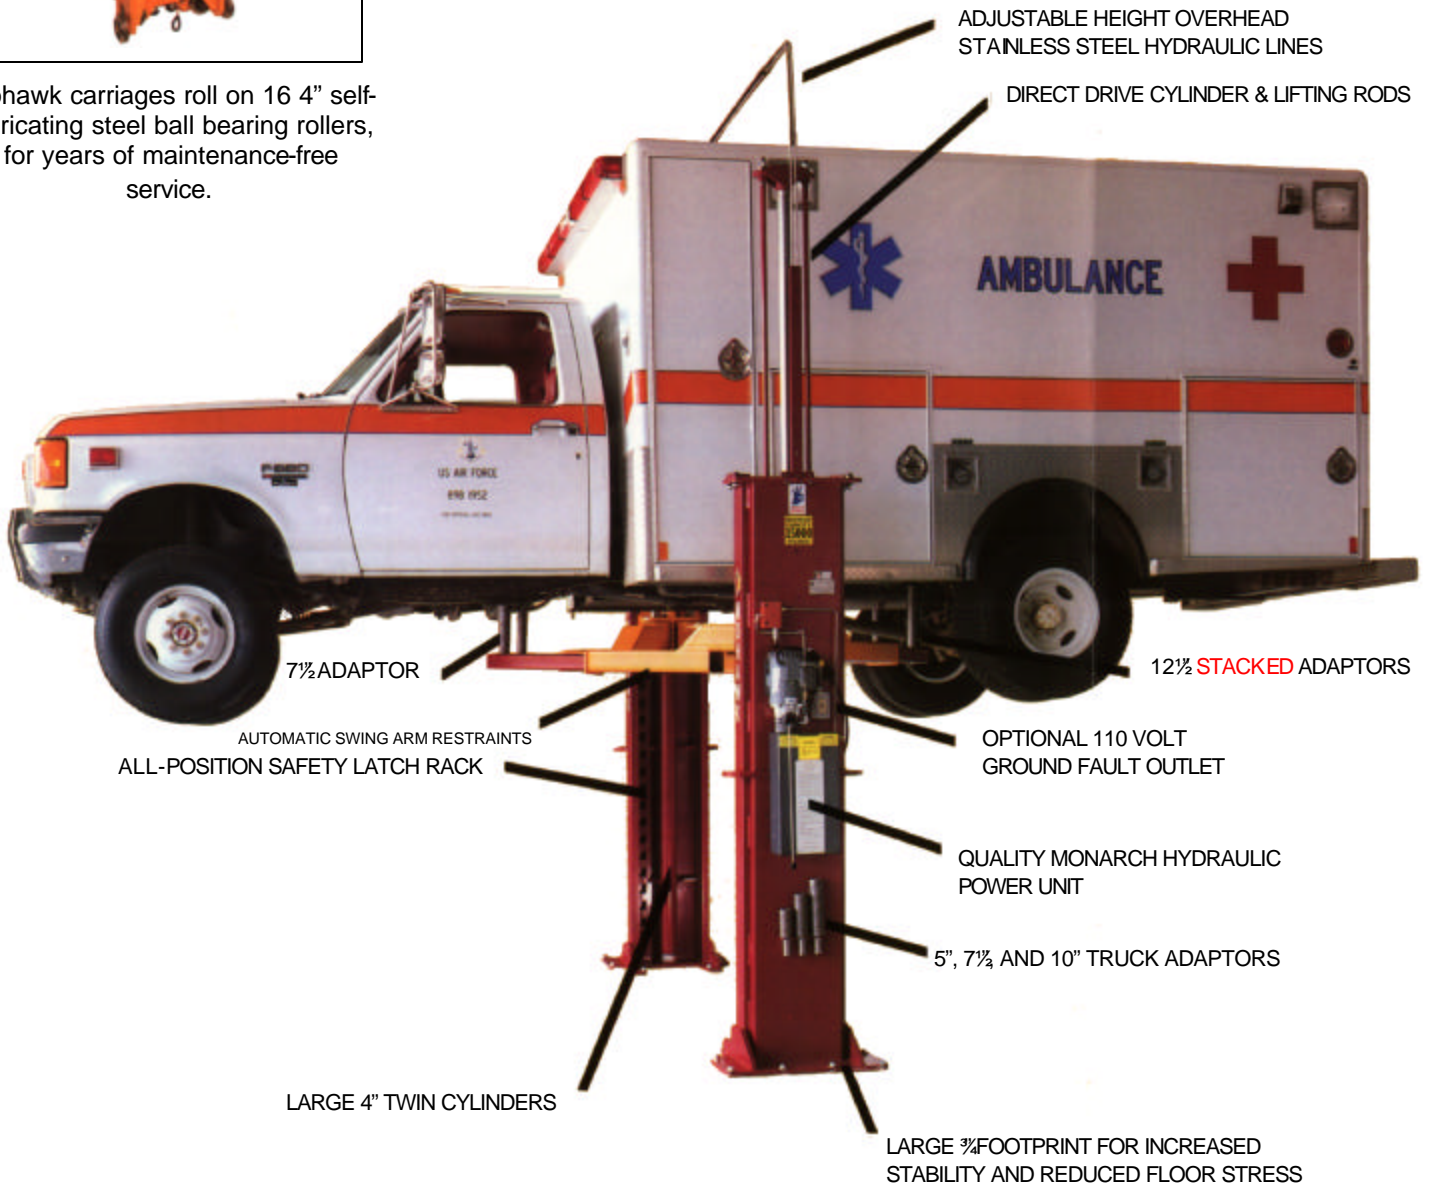

ADJUSTABLE HEIGHT OVERHEAD  
STAINLESS STEEL HYDRAULIC LINES

DIRECT DRIVE CYLINDER & LIFTING RODS

7½" ADAPTOR

12" STACKED ADAPTORS

AUTOMATIC SWING ARM RESTRAINTS  
ALL-POSITION SAFETY LATCH RACK

OPTIONAL 110 VOLT  
GROUND FAULT OUTLET

QUALITY MONARCH HYDRAULIC  
POWER UNIT


5", 7½" AND 10" TRUCK ADAPTORS

LARGE 4" TWIN CYLINDERS

LARGE ¾" FOOTPRINT FOR INCREASED  
STABILITY AND REDUCED FLOOR STRESS

# LMF-12 & TP-15 SPECIFICATIONS

<b>MODEL:</b>	<b>LMF-12 &amp; TP-15</b>
<b>Capacity:</b>	LMF-12 – 12,000 lbs. (5443.11 Kg) TP-15 – 15,000 lbs. (6803.90 Kg)
<b>Lifting Speed:</b>	100 sec.
<b>Motor Rating:</b>	LMF-12 – 2 HP/208-230V, single-phase (3-phase optional) TP-15 – 3 HP/208-230V, single-phase (3-phase optional)
<b>Synchronization:</b>	Hydraulic fluid displacement using no chains, cables, or overhead obstructions.
<b>Arm Pad Height:</b>	5" (12.7 cm) minimum
<b>Lifting Height (Stroke):</b>	6' (1.83 m)
<b>Arm Height @ Full Rise:</b>	6'5" (1.96 m)
<b>Max. Pad Height with Adaptors:</b>	7'3" (2.21 m)
<b>Overall Width:</b>	12'7½" (3.85 m) (Adjustable)
<b>Width Between Posts:</b>	10' (3.05 m) (Adjustable)
<b>Width Between Lifting Arms:</b>	8'9" (2.67 m) (Adjustable)
<b>Column Height:</b>	8'7" (2.62 m)
<b>Max. Cylinder Height:</b>	13'6" (4.11 m)
<b>Overhead Hydraulic Line Height:</b>	15' (4.57 m) standard (adjustable to accommodate any height ceiling or routed in-floor)
<b>Weight:</b>	LMF-12 – 3100 lbs. (1406.13 Kg) TP-15 – 3600 lbs. (1632.96 Kg)
<b>Concrete Floor:</b>	4000 PSI (27579.02 kPa) mix 6½" (16.51 cm) depth
<b>Anchoring System:</b>	16 ¾"x6" (1.91 x 15.24 cm) Wej-it bolts
<b>Mechanical Safety Locks:</b>	<b>Automatic; all position</b> starting @ 5" (12.7 cm) off the floor
<b>Hydraulic Safety Systems:</b>	<b>Automatic; all position</b>
<b>Swing Arm Restraints:</b>	<b>Automatic</b> upon ascent
<b>Cylinders:</b>	2 (1 per column)
<b>Drive System:</b>	Direct drive (using no cables or chains)
<b>5" Frame Adaptors (stackable):</b>	4 included as standard equipment
<b>7½" Frame Adaptors (stackable):</b>	4 included as standard equipment
<b>10" Frame Adaptors (stackable):</b>	4 included as standard equipment
<b>Steel Carriage Bearings:</b>	16 4" (10.16 cm) diameter (8 per Carriage) double-sealed, self- Lubricating
<b>Floor Access Between Posts:</b>	Clear and unobstructed
<b>Warranty:</b>	5 years limited <b>lifetime</b> cylinder warranty*

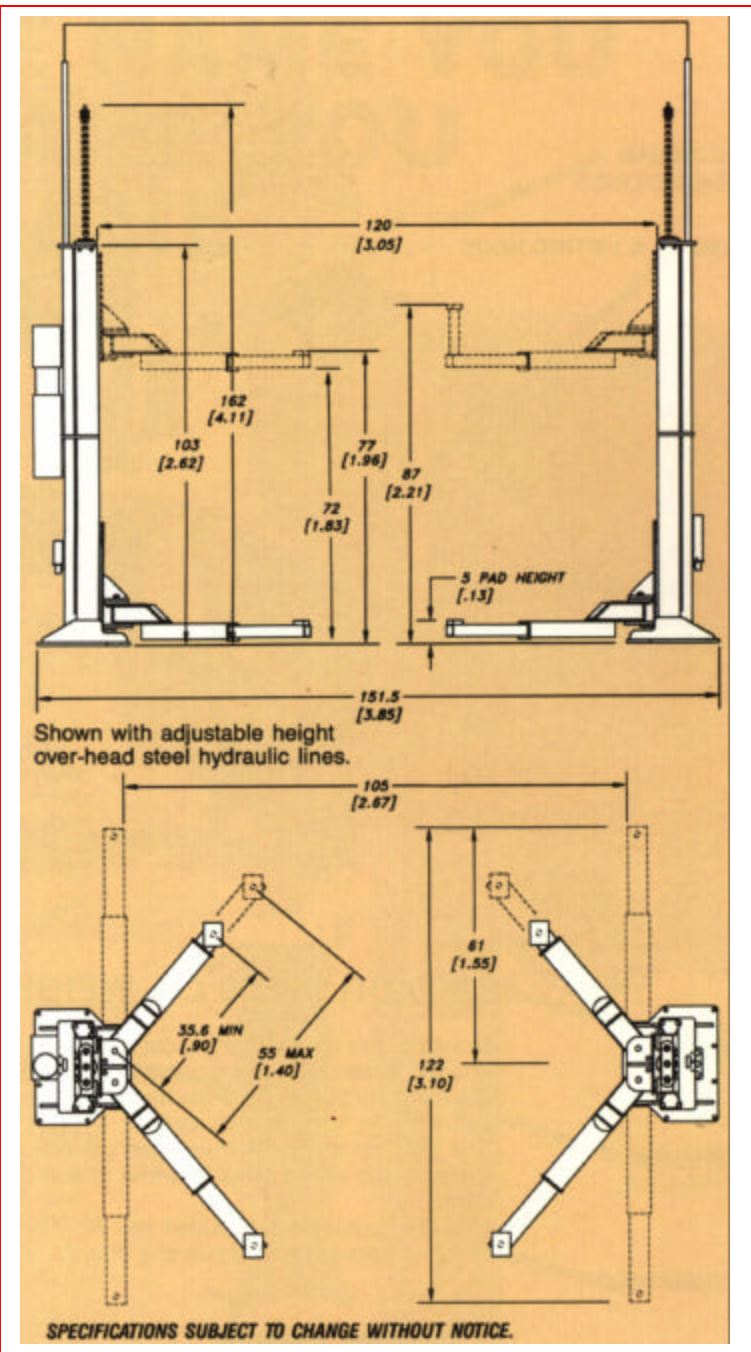

*Mohawk builds the best products with the finest materials, to the highest standards. Just compare our lifts. Our staff will assist you with a fleet evaluation, design assistance and answer any technical questions you have. We invite your calls.*

Mohawk lifts are manufactured in compliance with the following standards: ANSI, ASME, AISI, ASTM, OSHA, ASA, NEC, AWS, NEMA.

GSA Contract # GSO7F-7099B  
SIN#s 253-22, 253-23, 253-23A, 253-38A & 253-38  
CAGE CODE – OC714  
National Stock #4910-01-359-1079 (LMF)  
DUNS # 10-1289916

Links in [BLUE](#) will not work unless you're connected to the Internet.

**E-mail Mohawk's Sales  
Manager**



**BEFORE YOU BUY ANY  
LIFT, SEE A MOHAWK**



Mohawk Resources, Ltd.  
P.O. Box 110  
65 Vrooman Ave  
Amsterdam, NY 12010  
1-800-833-2006  
(518) 842-1431  
FAX: (518) 842-1289

[WWW.MOHAWKLIFTS.COM](http://WWW.MOHAWKLIFTS.COM)